



The Davies Pumps KC series are rugged cast iron single impeller pumps with close coupled motor design for simple and reliable operation. Closed impeller design and 1.5" ports makes these ideal for rural or industrial applications such as a small wash down pump, transfer or circulation.

Pump Features

- Cast Iron Housings
- Single impeller
- Robust and reliable
- Maximum liquid temperature 90 degrees
- Flows up to 350lpm
- Pressure up to 36m




DAVIES KC SERIES										
Part No.	НР	kW	Phase	Volts	Amps					
220-KC 150M	1.5	1.1	1	230	8.5					
220-KC 150T	1.5	1.1	3	400	3.7					
220-KC 200M	2	1.47	1	230	11.6					
220-KC 200T	2	1.47	3	400	4.7					
220-KC 300T	3	2.2	3	400	5.2					







KC SERIES

Performance:

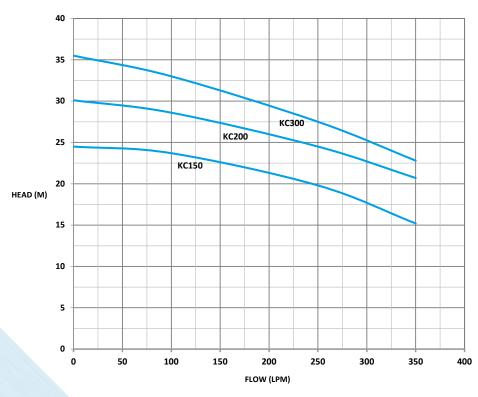





DIMENSION AND SPECIFICATIONS												
Model	A	ß	c	D	€	F	ØM	H1	H2	DNA	DN	К9
KC150	33	54	370	223	160	230	11	118	292	1 ½"	1 ½"	24.5
KC200	33	54	382	223	160	230	11	118	292	1 ½"	1 ½"	25.4
KC300	33	54	382	223	160	230	11	118	292	1 ½"	1 ½"	26.4

While every effort has been taken to publish correct details in this guide, due to a process of continuous development, no responsibility with be taken for errors, omissions or changes in product specifications. Images are representations only and may differ from actual product. Davies Pumps and the 'dp' logo are registered trademarks of Argon Distributors.