



LB Series

The Davies Pumps LB Series submersible drainage pumps have a rugged cast iron casing with stainless bottom strainer. Designed for drainage and de-watering in a wide range of applications such as construction sites, storm water removal and transferring clean or dirty water with suspended solids. Range of models available with single or three phase motors and with or without float switches for automatic operation.

Pump Features

- Cast Iron Construction
- Double mechanical seal
- Oil free motor
- Maximum liquid temperature 40 degrees
- Flows up to 430lpm
- Pressure up to 20m

DAVIES LB SERIES

Part No.	HP	kW	Phase	Volts	Amps	Outlet
240-LB40A	0.5	0.4	1	230	Yes	50mm
240-LB75A	1.0	0.75	1	230	Yes	50mm
240-LB75T	1.0	0.75	3	415	No	50mm
240-LB75TA	1.0	0.75	3	415	Yes	50mm
240-LB215A	2.0	1.5	1	230	Yes	50mm
240-LB215T	2.0	1.5	3	415	No	50mm
240-LB215TA	2.0	1.5	3	415	Yes	50mm

CONSTRUCTION



DRAIN LAYING






SITE WORK



LB SERIES

Performance:

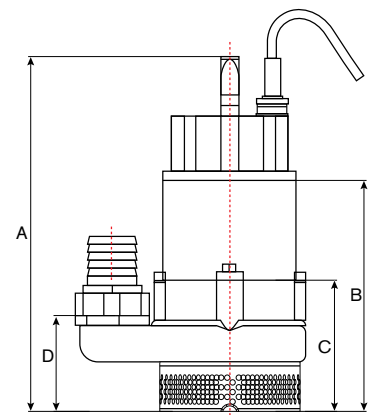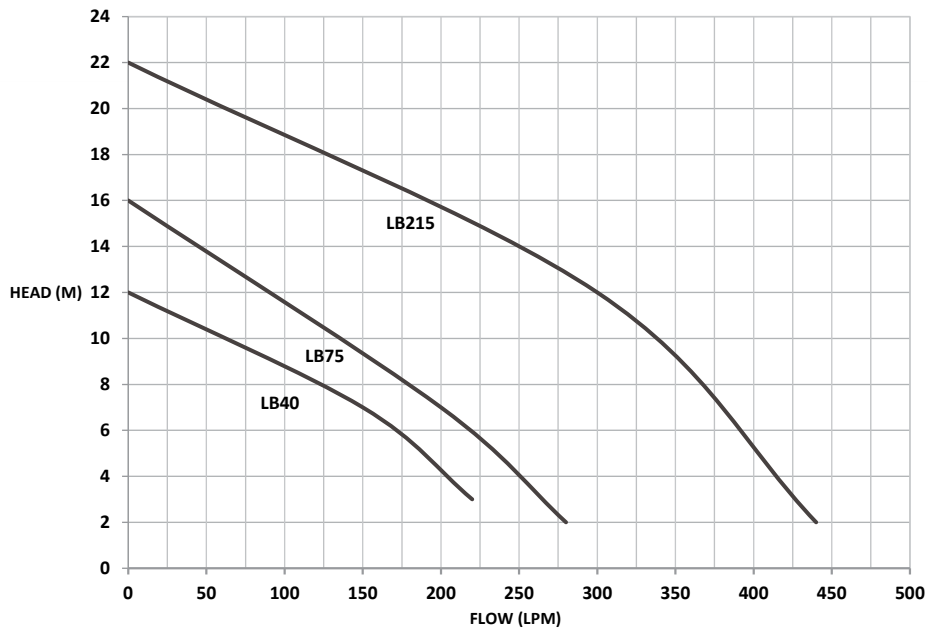

DIMENSIONS AND SPECIFICATIONS							
Model	A	B	C	D	X	Y	Z
LB40	345	227	125	87	228	155	84
LB75	395	270	145	110	270	210	84
LB215	440	320	150	110	314	210	120

For your nearest dealer please contact Argon Distributors: 0508 634 341